



iLOCK

SISTEMAS DE CIERRE ELECTRÓNICO ELECTRONIC LOCKING SYSTEMS

Infoterminal

The infoterminal complements the locker locking system, by operating like a terminal or information point for locker users.

- Very convenient for facilities with free assignment lockers .
- Proximity technology is used (contactless)
- Operative: by approaching a card/bracelet (it beeps to indicate the correct reading) , it shows the locker number occupied by the user. If there is no locker occupied, "free" message is shown.

WE MAKE
SENSE


ENKÖA



Characteristics

DESCRIPTION	Infoterminal or user information point
REFERENCE	IFExEM3BEA
POWER	9-15 VDC (200mA). 100-240VAC +-10% power supply unit included
CONSUMPTION	100 mA max.
RFID FREQUENCY	13.56MHz
READING DISTANCE	10 to 20 mm (depending on the type of tag)
DISPLAY	Alphanumeric LCD 16x1/beeper
OPERATING TEMPERATURE	-0 to 50°
DIMENSIONS	Height 150, width 120 and depth 43mm.
WEIGHT	250gr.
COMPATIBLE TAGS	Mifare Classic Mini/1k/4k/ultralight

Dimensions

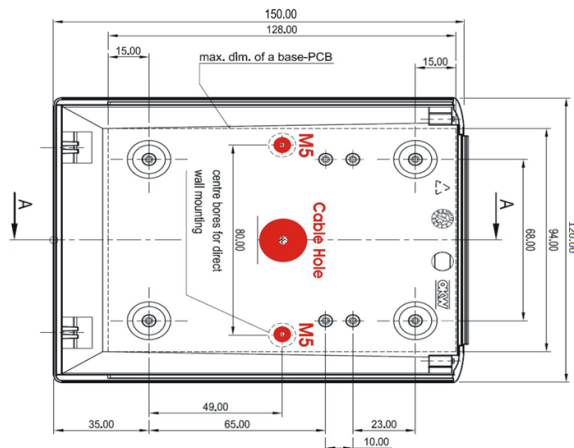

Benefits

CONTACTLESS: By approaching a card/ bracelet to the info-terminal.

MULTITECHNOLOGY.

INFORMATIVE: It shows the locker number taken by the user or free in case there is no locker occupied.