



SISTEMAS DE GESTIÓN DE ESPACIOS SPACE MANAGEMENT SYSTEMS

Free parking space indicating display - IP

For "indoor" parking guidance systems in:

- Shopping centres/ retails
- Public car park
- Airport
- Hotels

WE MAKE
SENSE

ENKOA




FREE PARKING SPACE INDICATING DISPLAY - IP



Characteristics

DESCRIPTION	Free parking space indicating display IP outdoor with 2 lines
REFERENCE	DISxG1E2C
POWER	Universal (85-264VAC)
CONSUMPTION	10W
INTERFACE	Ethernet
PIXELS	16 (height) x 64 (width) pixels. RGY (Red/green/yellow). Pitch 7,62mm (distancia between pixels)
OPERATING CONDITIONS	Temperature: -10°C a +40°C/Humidity: 15% a 95%RH.
VISUALIZATION DISTANCE	Max. 50m
LED ANGLE	120 ° horizontal, 120 ° vertical
BRIGHTNESS	750 cd/m2 without front cover, 370 cd/m2 with front cover
POWER CABLE	1,5mm2 section cross cable
LED LIFE	>100000 hours
CONNECTIONS	Through bornes using screws
ENVELOPING CASE	Black painted aluminium
DIMENSIONS	Housing: 182x548x85 mm and 4 kgs/ Display area: 122x488mm

Dimensions

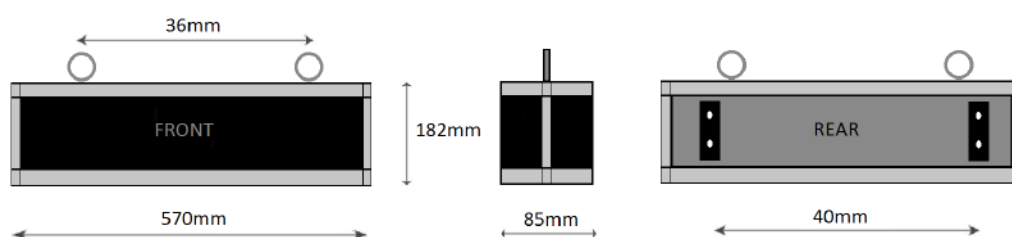

Benefits

MAX FREE PARKING SPACES: up to 9999 spaces.

OUTDOORS. It is suitable for outdoors/indoors.

TYPE OF MESSAGES : 11 messages: "arrow +999"(free spaces)/"9999" (free spaces) /"text" (3 characters)+ " n° free parking spaces"/ text (7 characters)



Enkoa System S.L.

Polígono Erramone 45, 20850 Mendaro. Gipuzkoa. Spain
T +34 943 757 000 | info@enkoea.com
www.enkoa.com

