



i COUNT

SISTEMAS DE GESTIÓN DE ESPACIOS

SPACE MANAGEMENT SYSTEMS

Free parking space indicating display - IP

For parking guidance systems in:

- Shopping centres/ retails
- Public car park
- Airport
- Hotels

WE MAKE
SENSE


ENKOA



Characteristics

DESCRIPTION	Free parking space indicating display IP outdoor with 2 lines
REFERENCE	DISxG1E2C
POWER	Universal (85-264VAC)
CONSUMPTION	15W
INTERFACE	Ethernet RJ45
PIXELS	16 (height) x 64 (width) pixels. RGY (Red/green/yellow). Pitch 7,62mm (distancia between pixels)
OPERATING CONDITIONS	Temperature: -20°C a +40°C/Humidity: 15% a 95%RH.
VISUALIZATION DISTANCE	Max. 50m
LED ANGLE	110 ° horizontal, 55 ° vertical
BRIGHTNESS	5.000 cd/m2 without front cover.
POWER CABLE	1,5mm2 section cross cable
LED LIFE	>100.000 hours
CONNECTIONS	Through bornes using screws
ENVELOPING CASE	Black painted aluminium
DIMENSIONS	Housing: 182x568x105 mm and 5 kgs/ Display area: 122x488mm

Dimensions

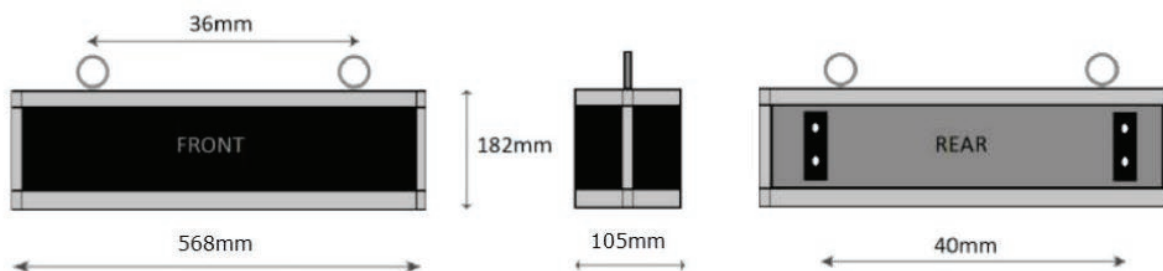

Benefits

MAX FREE PARKING SPACES: up to 9999 spaces.

OUTDOORS. It is suitable for outdoors/indoors.

TYPE OF MESSAGES : 15 messages to select with 1 or 2 lines. Electric vehicle and handicapped symbols. Arrows and 4 directions. Text.