



**iLOCK**

# SISTEMAS DE CIERRE ELECTRÓNICO ELECTRONIC LOCKING SYSTEMS


## Gateway 2.0

It is an essential key for facilities with wireless locker locks, since it works as a link in the communications between wireless locks and iVIEW software for lockers.

WE MAKE  
SENSE


**ENKOA**

## Characteristics

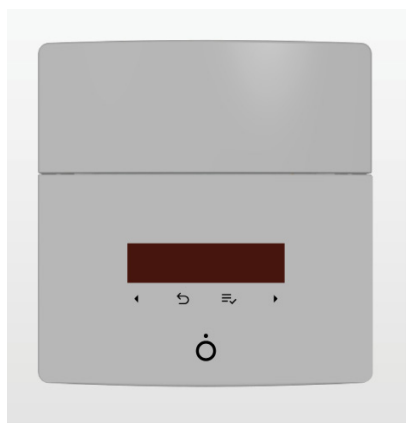

DESCRIPTION	Gateway for iLOCK wireless system
REFERENCE	GATxK3P4
POWER	VIN 5-12 VDC / 500mA. DC Jack. External AC/DC adapter included PoE / Power over Ethernet according to IEEE 802.3af (RJ-45)
LED COLOR	Front logo iluminated.
MEMORY	EEPROM external storage memory with 512 kbytes
DISPLAY	LCD, alphanumeric of 16 caracteres x 2 lines.
KEYBOARD	4 key matrix attached to the box to configure functions
COMMUNICATION INTER-FACE	Modbee (IEEE 802.15.4) - Channel 11 (2405 Mhz) Ethernet RJ-45 HTTP Wi-Fi (opcional)
CLOCK CALENDAR	In real time >20 year autonomy.
TEMPERATURE/HUMIDITY RANGE	0°C ÷ 40°C/ 5 ÷ 95% RH non-condensing
BUZZER	Internal buzzer
COLOR	Light gray RAL 7035
DIMENSIONS/ WEIGHT	140mm (height) x140mm (width) x46mm (depth)/500g

## Dimensions

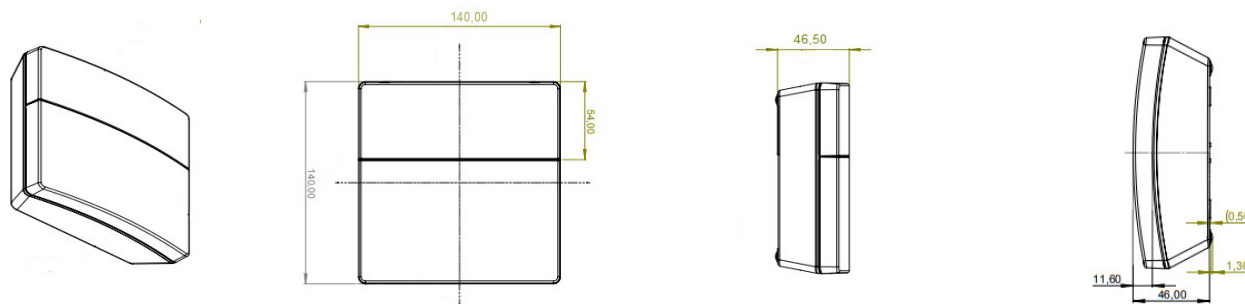

## Benefits

### ENHANCED NEW VERSION

- Small size and improved design.
- Easy to install and mount.
- Capacitive and audible keyboard.
- More internal memory and processing speed.
- Front logo iluminated.
- Wifi optional.
- Real time clock (no need to time setting)

**MAX.ELEMENTS** : It manages up 100\* locker locks.

**HIGH DISTANCE COVERAGE**: It covers an area extension of 40-50 metres.

\*For more locker locks please check.